


PAS-4

Diesel driven pump 4", sound attenuated

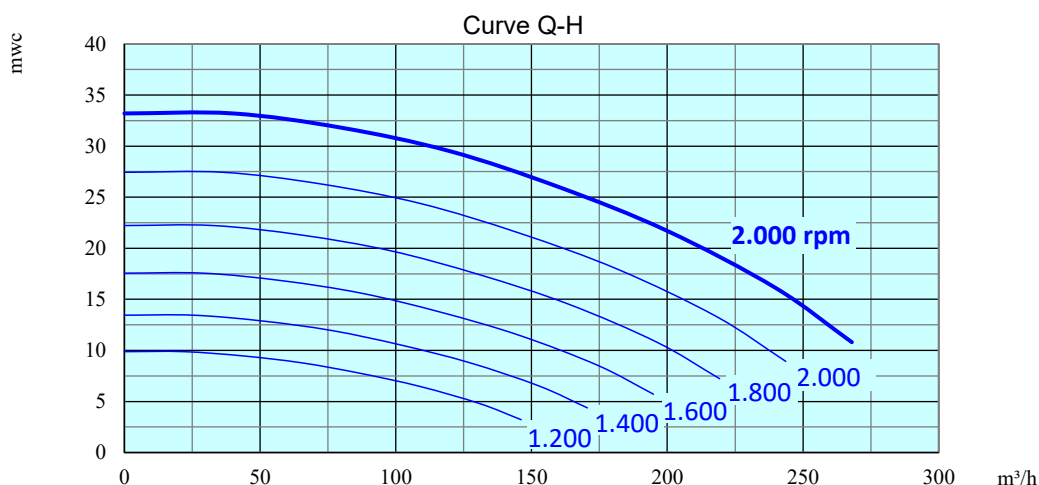

Type	: PAS4-KDS3A
Applications	: Sludge, waste water, sewage, ...
Engine	: Kubota watercooled diesel motor, type V2403-M-DI
Power output	: 25,7 kW at 2.200 rpm
Pump	: Centrifugal pump P4-220G
Free impeller passage	: 45 mm
Starting system	: 12 V electrical start
Weight	: 1.070 kg (Dry)
Tankage	: 300 liters
Consumption	: 7 liters / hour at maximum capacity
Dimensions	: 2.145 x 950 x 1.368 mm
Coupling	: suction and discharge : Perrot quick couplings 4" male
Characteristics	: automatic dry self priming
Equipment	: sound attenuated, fully banded canopy 67 dB at 7 m equipped with a Qc1011 control panel, adjustable speed, float switches for automatic working, spark arrester, threeway valve for connection of an external fuel tank, central lifting eye and forklift pockets