


PP1212 – 952VE

Diesel driven pump 12", high pressure

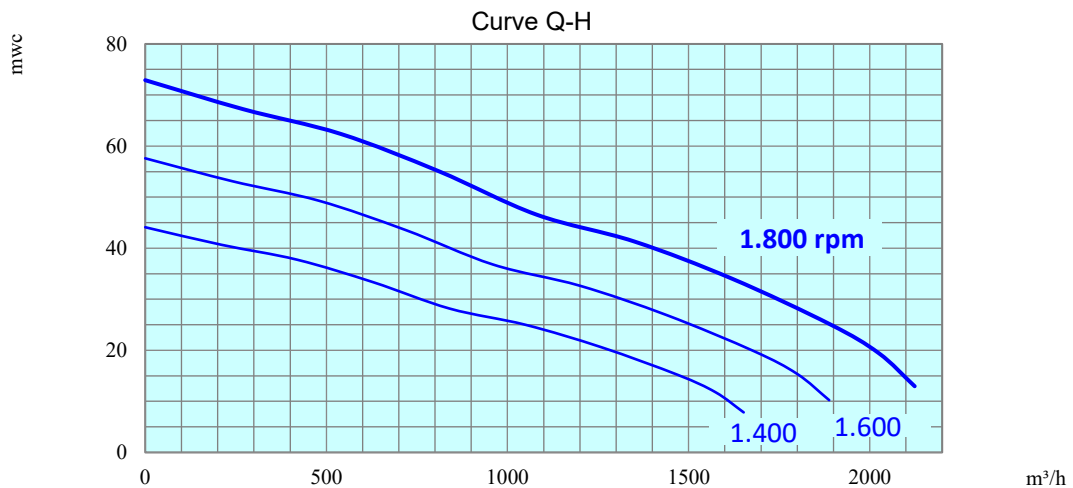

Type	: Pioneer PP1212S16,5 – Volvo TAD952VE
Applications	: clear to polluted water
Engine	: Volvo six cylinder diesel engine, watercooled, type TAD952VE, sound attenuated
Power output	: 235 kW at 1.800 rpm
Free impeller passage	: 95 mm
Starting system	: 24 V electrical start
Weight	: ± 7.500 kg (this is an approximation, exact weight will be communicated at a later date)
Tankage	: 350 liters
Consumption	: 50 liters/ hour at maximum capacity
Autonomy	: 6 hours at maximum capacity
Dimensions	: 5.020 x 1.540 x 2.510 mm
Coupling	: suction & discharge : ASA flange DN300
Characteristics	: on skid, fully banded, sound attenuated ca.75dB at 10m automatic dry self priming, limited dry-running possible
Equipment	: adjustable speed, Chalwyn valve and spark-arrestor, master switch, automatic level adjustment by 2 floats or probe 4-20 mA, threeway valve for the connection of an external fuel tank, central lifting eye and forklift pockets