


## QI150 RT Mobile diesel driven pump 6", sound attenuated



Curve Q-H

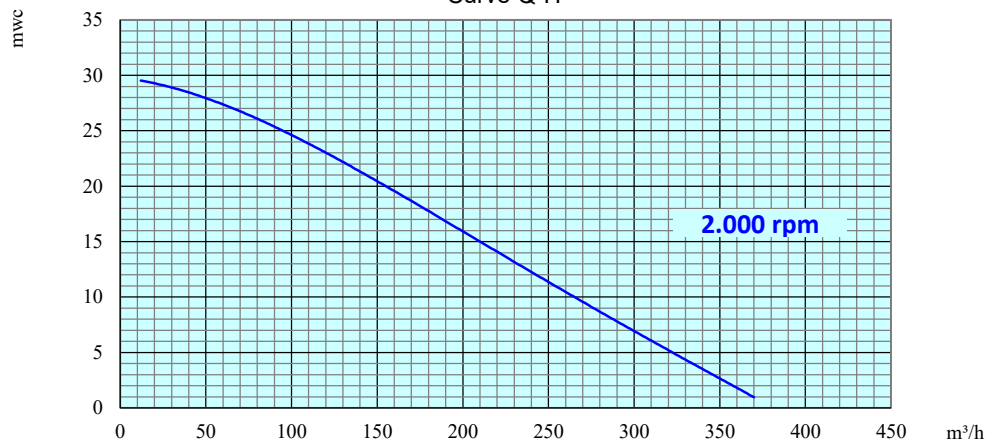

Type	: SPP Pumps, QI150
Applications	: sewage, sludge, ....
Engine	: Isuzu watercooled diesel engine type 3LD1
Power output	: 18 kW at 2.000 rpm
Free impeller passage	: Ø 65 x 80 mm
Starting system	: 12 V electrical start
Weight	: 1.280 kg ( full tank )
Tankage	: 220 liters
Consumption	: 5,5 liters / hour at maximum capacity
Autonomy	: 38 h (at maximum capacity)
Dimensions	: 3.047 x 1.524 x 1.676 mm
Coupling	: suction and discharge : Perrot quick couplings 6" male
Characteristics	: road trailer: mobile, easy to move dry self priming, indefinite dry-running possible, without damage
Equipment	: sound attenuated, fully banded canopy 65 dB at 7 m , spark-arrestor adjustable speed central lifting eye threeway valve for the connection of an external fuel tank