


## QI200 RT Mobile diesel driven pump 8", sound attenuated

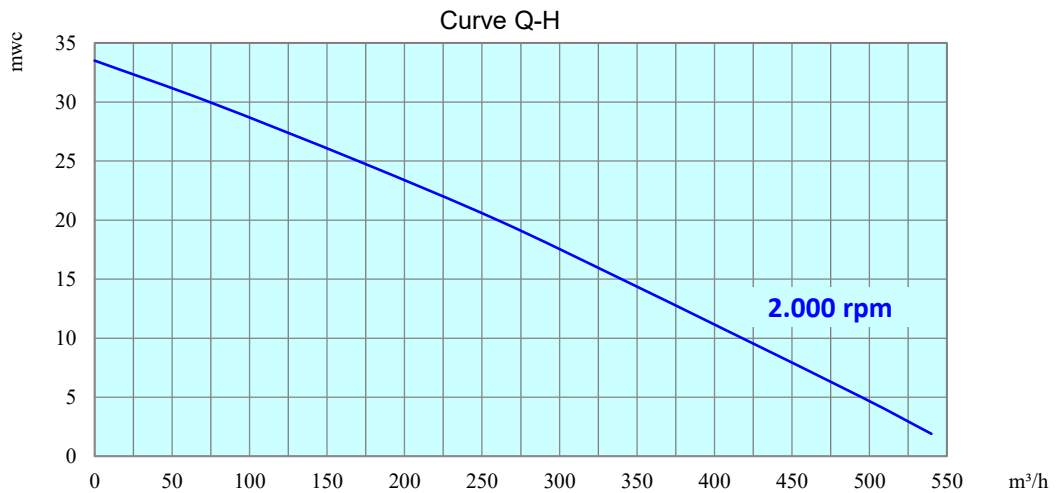

Type	: SPP Pumps, QI200
Applications	: sewage, sludge, slurry, ...
Engine	: Isuzu watercooled diesel engine type 4LE1
Power output	: 25,6 kW at 2.000 rpm
Free impeller passage	: Ø 75 x 90 mm
Starting system	: 12 V electrical start
Weight	: 1.450 kg ( full tank )
Tankage	: 220 liters
Consumption	: 7,8 liters / hour at maximum capacity
Autonomy	: 28 h ( at maximum capacity )
Dimensions	: 3.800 x 1.600 x 1.786 mm
Coupling	: suction and discharge : Triflex quick couplings 8" male
Characteristics	: road trailer, easy to move automatic dry self priming, indefinite dry-running possible, without damage
Equipment	: sound attenuated, fully banded canopy 65 dB at 7 m adjustable speed, central lifting eye, master switch threeway valve for the connection of an external fuel tank