


TEF3-50R Gasoline engine driven pump 2"

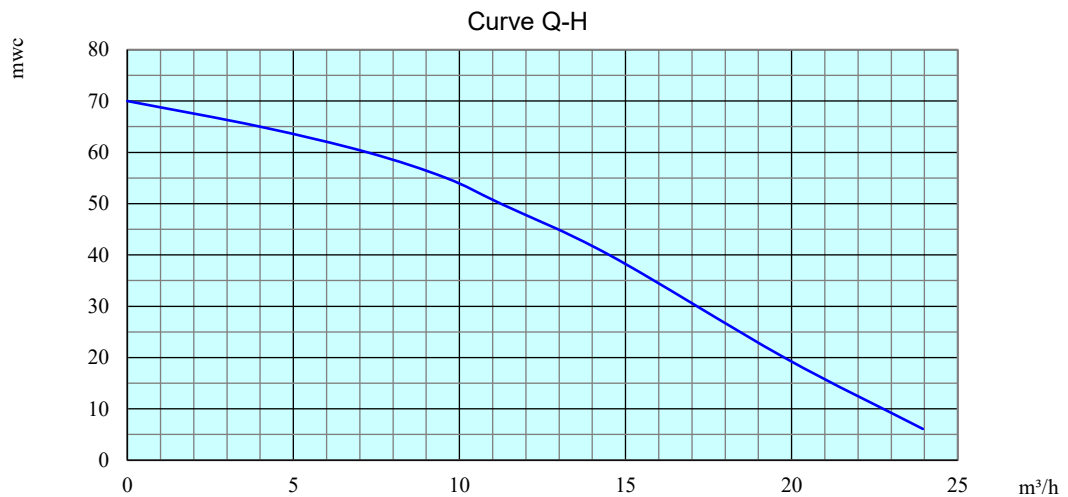

Type	: Tsurumi, TEF3-50R
Applications	: direct flushing, ...
Engine	: Robin gasoline engine, aircooled, type EY 20D
Power output	: 3,7 kW at 3.600 rpm
Free impeller passage	: 0,5 mm
Starting system	: recoil start
Weight	: 37 kg (full tank)
Tankage	: 3,8 liter
Consumption	: 1,4 liter/hour at maximum capacity
Dimensions	: 550 x 410 x 490 mm
Coupling	: suction and discharge side : Perrot quick couplings 2" male
Characteristics	: dry self priming after a first filling of the pump casing mobile set engine with oil level sensor
Equipment	: metal protection frame shock absorbers