


## T8 – Wilden

### Compressed-air-powered double-diaphragm pump 2"

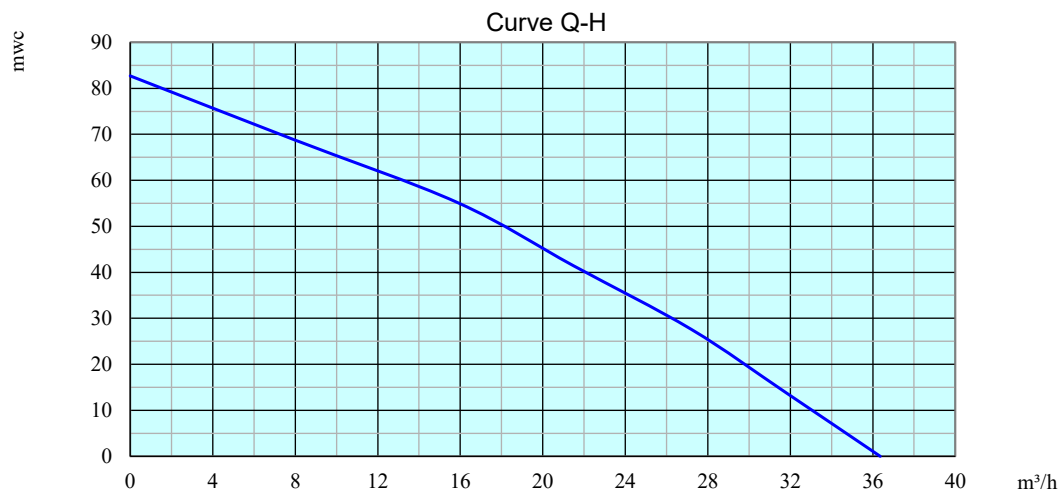

Type	: Wilden T8
Applications	: clean water, sandy water ...
Engine	: compressed-air-powered
Compressed air pressure	: max. 8,6 bar
Compressed air flow	: max. 170 Nm³/h
Compressed air	: quick coupling NOK 42mm
Free impeller passage	: 6,4 mm
Weight	: 69 kg
Dimensions	: 600 x 700 x 970 mm
Coupling	: suction & discharge : Perrot quick couplings 2" male
Characteristics	: automatic dry self priming till 6,4 m indefinite dry-running possible membrane Buna-N Temp -12°C up to 65°C
Equipment	: adjustable expansion valve ( flow/pressure regulation ) central lifting eye, forklift pockets