




Atlas Copco



Complete submersible dewatering solutions

The WEDA range (50 Hz)

WEDA submersible pumps

WEDA electric submersible pumps and accessories are designed for an extensive range of dewatering applications, across multiple industries. They provide the performance, reliability and ease of use you need. WEDA pumps feature a built-in starter and motor protection system along with optional automatic level control. Adjustable wear-resistant rubber diffusers and hardened high-chrome impellers ensure durability in tough environments.

At Atlas Copco, we understand pumps, their applications and, most importantly, the people using them. We have a complete range of high-quality and lightweight electric submersible pumps designed specifically for drainage, sludge and slurry pumping applications and available in global voltages.

WEDA pumps are made for durability. The unique sealing system and modular design make them among the most flexible pumps on the market. Easy to use and maintain, WEDA pumps promise optimal performance. The WEDA seal system is designed to provide the optimum maintenance solution and can be easily fitted at the job site.



SPECIFIC GRAVITY
UP TO **1,7**



SOLIDS HANDLING
UP TO **60** mm



UP TO **40%**
LIGHTER IN WEIGHT






HIGH WEAR RESISTANCE



There is a WEDA pump for any dewatering application

We understand the dewatering needs of our customers, which vary with location and application. Accordingly our submersible range is developed for drainage (D), sludge (S) and slurry (L) applications.

These applications call for pumps designed specifically for handling corrosive and abrasive media and their solid contents.

Drainage pumps (WEDA D)	Sludge pumps (WEDA S)	Slurry pumps (WEDA L)
		
SPECIFIC GRAVITY UP TO 1,1	SPECIFIC GRAVITY UP TO 1,4	SPECIFIC GRAVITY UP TO 1,7
DESIGN TOP DISCHARGE	DESIGN BOTTOM SIDE DISCHARGE	DESIGN BOTTOM SIDE AND TOP DISCHARGE
SOLIDS HANDLING FROM 4 TO 12 mm	SOLIDS HANDLING FROM 25 TO 50 mm	SOLIDS HANDLING FROM 20 TO 60 mm
pH VALUES FROM 5 TO 8	pH VALUES FROM 5 TO 8	pH VALUES FROM 2 TO 10

Applications

- General dewatering
- Ground water
- Raw water
- Construction sites
- Water containing mud
- Sludge or light slurry
- Tank clean-out
- Trench and pond cleaning
- Mining
- Abrasive media with high solids content
- Quarries
- Dredging
- Settling ponds

WEDA D range

The WEDA drainage pumps handle either clean or dirty water, even with small solids with the best performance and efficiency.

HIGH CORROSION RESISTANCE

Unique aluminum alloy offers the perfect combination of strength, light weight and corrosion resistance

FLEXIBILITY

Discharges can be mounted vertically or sideways as required

MOTOR PROTECTION


Class F motors, with thermal switches in each winding

EXTENDED PERFORMANCE

Pump design ensures all-round motor cooling for better performance

WEDA+

1. Rotation control
2. Phase failure protection
3. Thermal switches
4. Phase shifter plugs for three-phase pumps
5. Eliminates the need for external starter

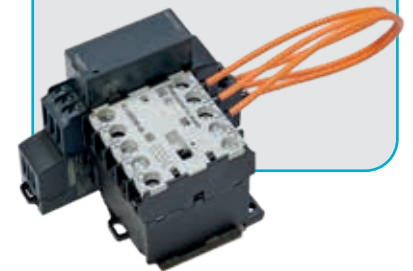

IMPROVED CABLE SEALING

Ensures protection against water leakage from cable entry


MODULAR SEALING SOLUTION

Based on pump size, the sealing system is adapted to provide the best solution

IMPROVED WEAR RESISTANCE

High-chrome (55HRC) impellers provide higher wear resistance

55  HRC

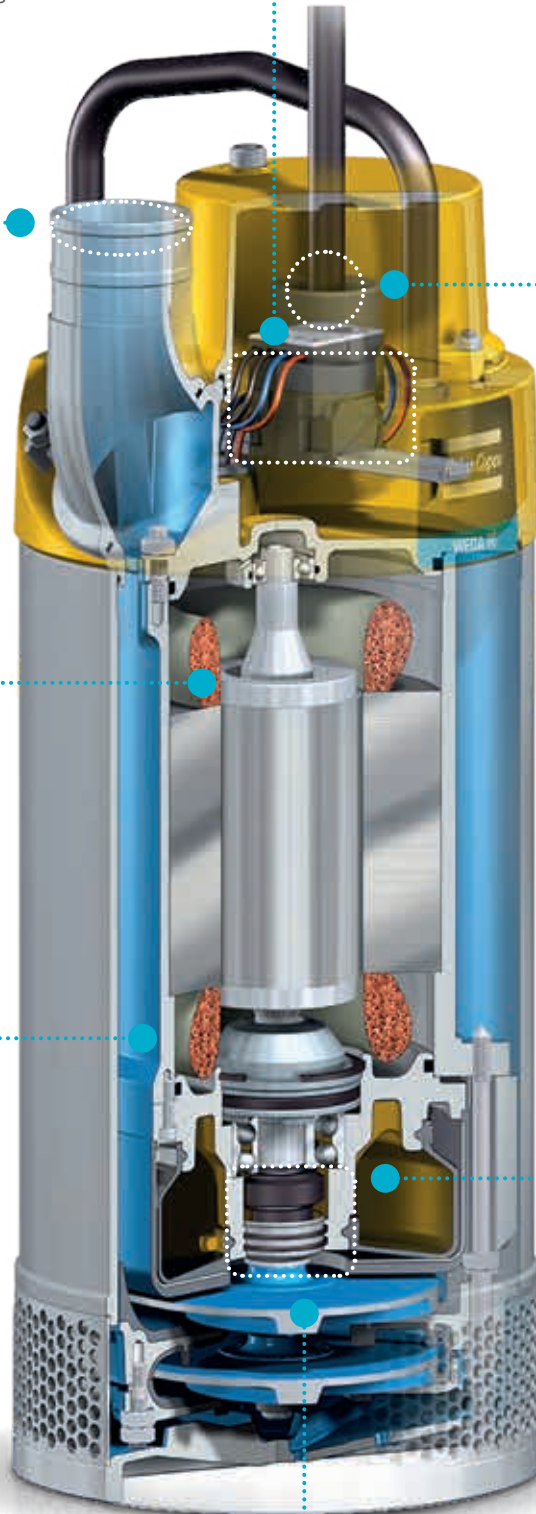

WEDA S range

The WEDA sludge pumps can handle thick, soft, wet mud or other similarly viscous mixtures of liquids and solids, especially the product of an industrial or refining process.

IMPROVED CABLE SEALING

Ensures protection against water leakage from cable entry

DRY RUNNING CAPABILITIES

Improved rib design offers external cooling to motor for extended running time

MOTOR PROTECTION

Class F motors, with thermal switches in each winding

HIGHER SOLIDS HANDLING

Sludge pumps can handle solids up to 50 mm


 **SOLIDS HANDLING**
FROM **25 TO 50mm**

ROBUST DESIGN

Base of the pump ensures stability while enabling passage of large solids

WEDA+

1. Rotation control
2. Phase failure protection
3. Thermal switches
4. Phase shifter plugs for three-phase pumps
5. Eliminates the need for external starter

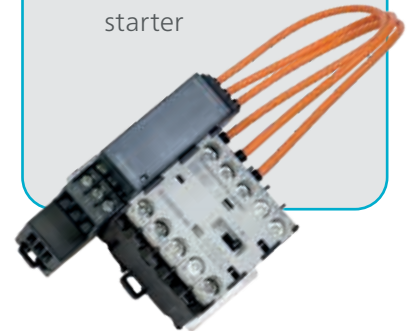

EASY INSPECTION

External oil inspection plug for quick inspection of oil

MODULAR SEALING SOLUTION

Based on pump size, the sealing system is adapted to provide the best solution


SUSTAINABLE PERFORMANCE

High-chrome (55HRC) impellers provide higher wear resistance

55 
HRC

WEDA L range

The WEDA slurry pumps are the toughest, and have the largest apertures to facilitate handling of slurry with the most challenging solids.

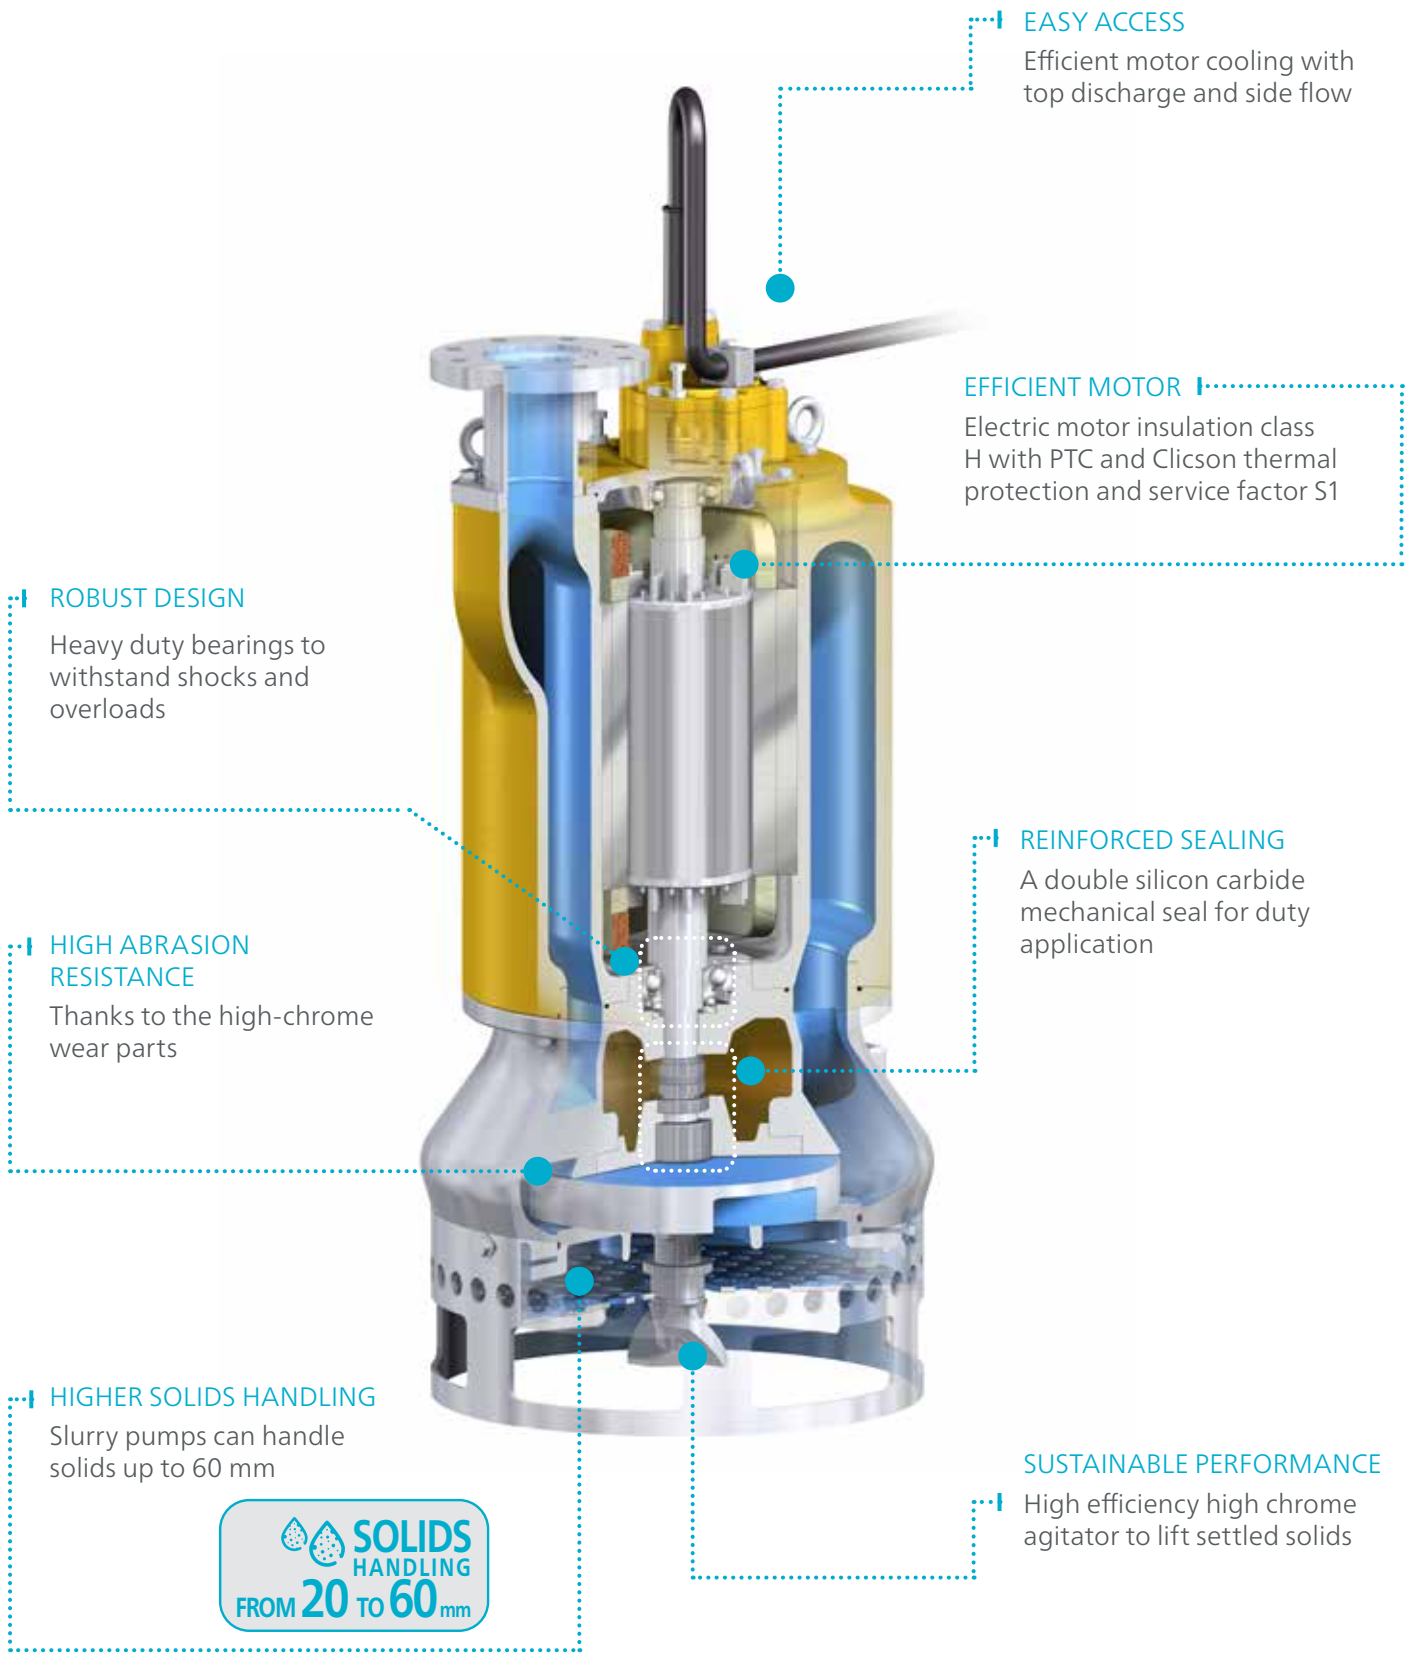

EASY ACCESS

Efficient motor cooling with top discharge and side flow

EFFICIENT MOTOR

Electric motor insulation class H with PTC and Clicson thermal protection and service factor S1

ROBUST DESIGN

Heavy duty bearings to withstand shocks and overloads

HIGH ABRASION RESISTANCE

Thanks to the high-chrome wear parts

REINFORCED SEALING

A double silicon carbide mechanical seal for duty application

HIGHER SOLIDS HANDLING

Slurry pumps can handle solids up to 60 mm

SUSTAINABLE PERFORMANCE

High efficiency high chrome agitator to lift settled solids

 **SOLIDS HANDLING**
FROM **20** TO **60** mm

Tough environments demand tough pumps

The unique construction of the WEDA pumps provides high corrosion resistance in a wide range of applications.




WEDA D range

Technical data



		WEDA D04N	WEDA D048N	WEDA D08N	WEDA D10N		WEDA D30L		WEDA D30N		WEDA D40N
Specifications		1ph	1ph	1ph	1ph	3ph	1ph	3ph	1ph	3ph	3ph
Max. head	m	11.3	12.0	14.8	14.5	14.5	15.5	15.0	23	22	20
Max. flow	l/min	250	120	325	490	490	1450	1425	820	810	1600
	m ³ /h	15.0	7.2	19.5	29	29	87	85	49	48	96
Shaft speed	r.p.m.	2900	2900	2900	2900	2900	2900	2900	2900	2900	2900
Rated output	kW	0.4	0.4	0.75	1.0	1.0	2.0	2.0	2.0	2.0	3.0
Max. power input	kW	0.65	0.65	1.2	1.6	1.3	2.6	2.4	2.6	2.4	3.3
Discharge connection	inch	2"	1"	2"	2"	2"	3"	3"	3"	3"	3"
Max. solids handling size	mm	7.5	4.5	7.5	4	4	7	7	7	7	7
Weight and dimensions											
Weight	kg	9.0	9.5	12.4	13.0	13.0	20	20	20	20	25
Height	mm	340	415	358	470	470	525	525	525	525	525
Width	mm	182	220	183	225	225	290	290	290	290	290
Diameter	mm	182	220	183	185	185	220	220	220	220	220

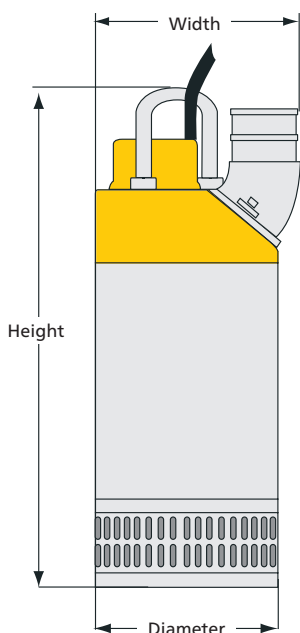


Typical applications

- General construction
- Ground water
- Raw water
- Construction sites




Performance curves


WEDA D04N

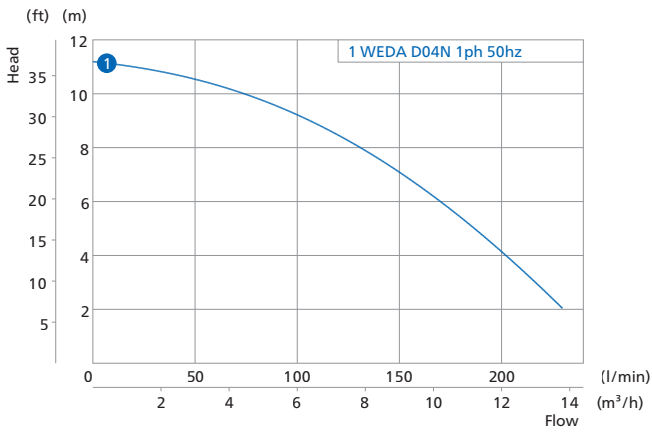


WEDA D04BN

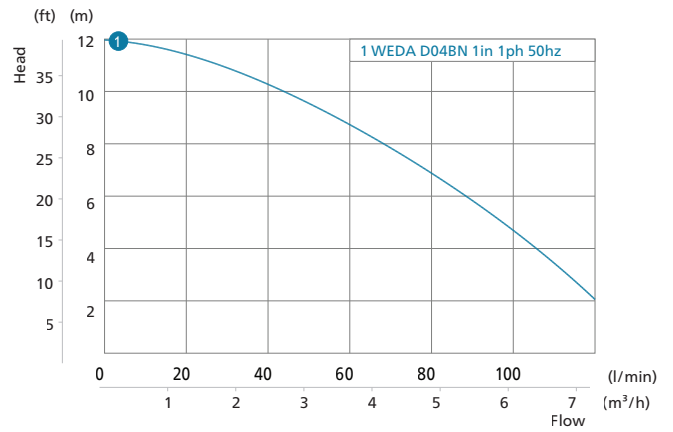


WEDA D08N

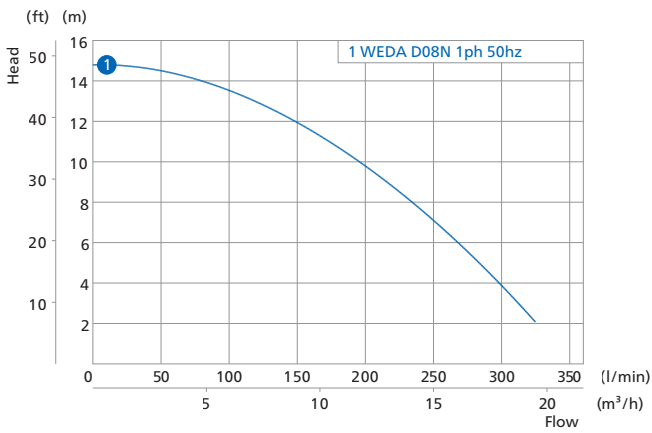


WEDA D10N

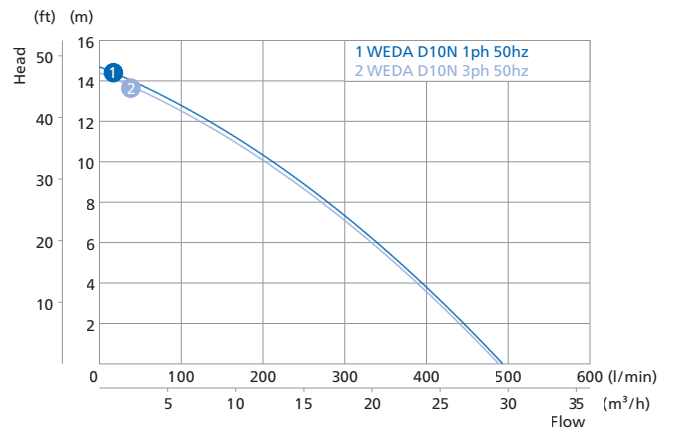

WEDA D30L, D30N

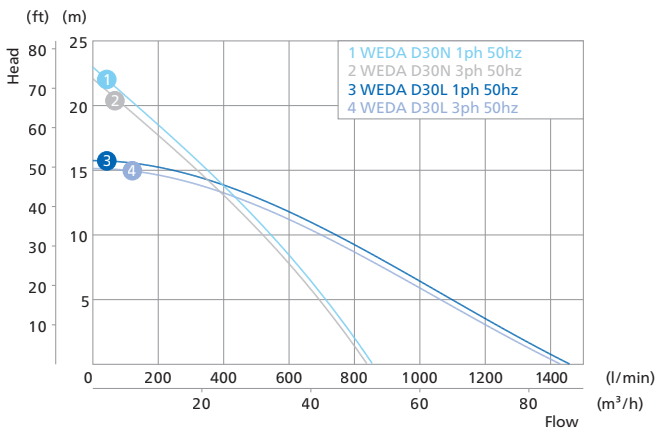

WEDA D40N

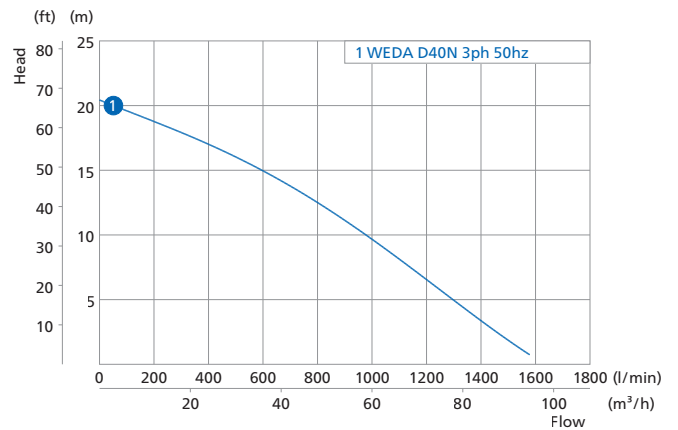

WEDA D range


Technical data



		WEDA D50N	WEDA D50H	WEDA D60N	WEDA D60H	WEDA D60SH	WEDA D70L	WEDA D70H	WEDA D80N	WEDA D80H	WEDA D90L	WEDA D90H	WEDA D100N
Specifications		3ph	3ph	3ph	3ph	3ph	3ph	3ph	3ph	3ph	3ph	3ph	3ph
Max. head	m	24	38	28	38	59	37	57	40	65	44	86	43
Max. flow	l/min	2300	1150	2600	1500	1050	4600	2500	6000	2500	7000	2400	21000
	m ³ /h	138	69	156	90	63	276	150	360	150	420	144	1260
Shaft speed	r.p.m.	2900	2900	2900	2900	2900	2900	2900	2900	2900	2900	2900	1450
Rated output	kW	5.6	5.6	7.5	7.5	7.5	12	12	20	20	27	27	54
Max. power input	kW	6.5	6.5	9.1	9.1	9.1	14.4	14.4	22	22	28	28	67
Discharge connection	inch	4"	3"	4"	3"	3"	6"	4"	6"	4"	6"	4"	10"
Max. solids handling size	mm	8	8	8	8	8	10	10	12	12	7	7	12
Weight and dimensions													
Weight	kg	55	55	61	61	62	110	110	175	175	180	180	510
Height	mm	720	720	760	760	760	943	943	980	980	1100	1100	1412
Width	mm	330	302	330	302	302	416	393	690	665	480	480	650
Diameter	mm	278	278	278	278	278	370	370	530	530	400	400	600


Typical applications

- General construction
- Ground water
- Raw water
- Construction sites

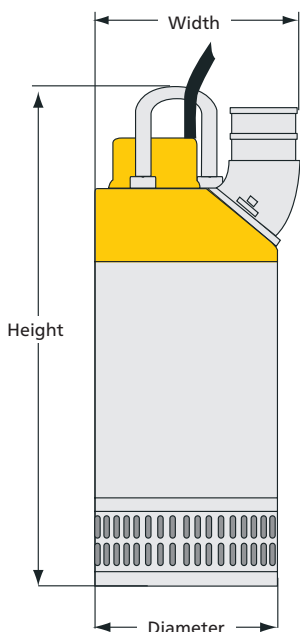


Performance curves


WEDA D50N, D50H

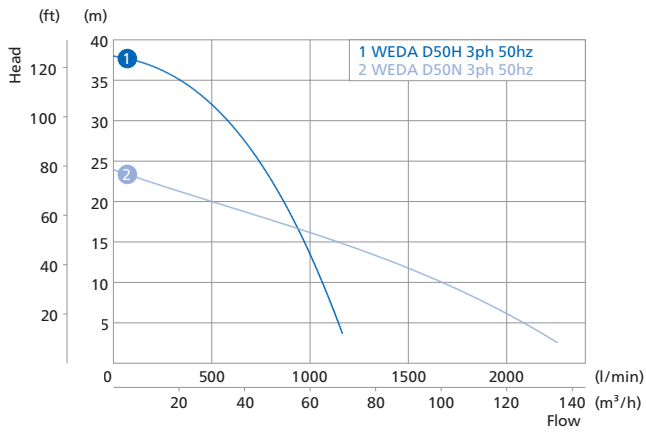


WEDA D60N, D60H, D60SH

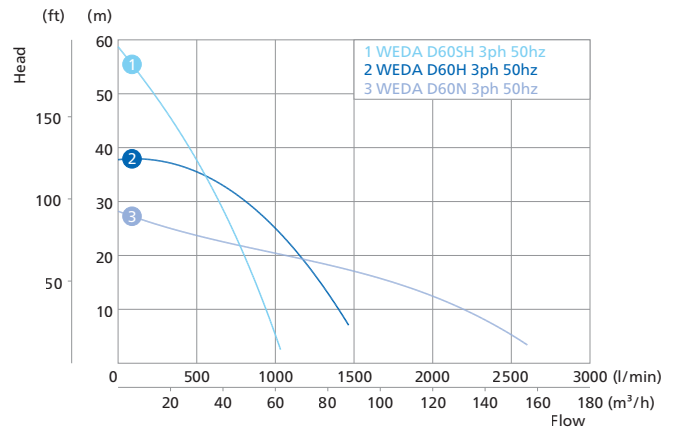


WEDA D70L, D70H

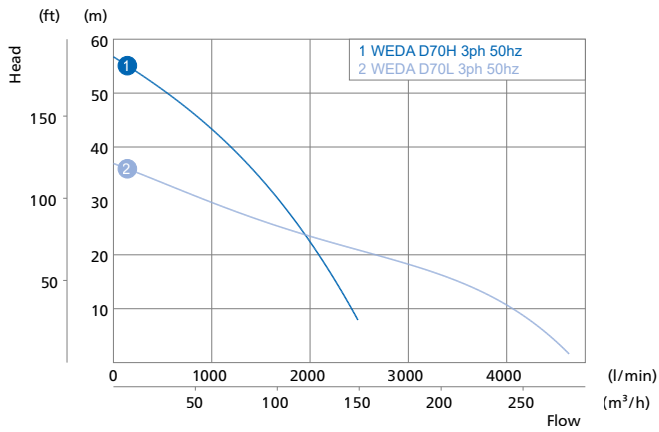


WEDA D80N, D80H

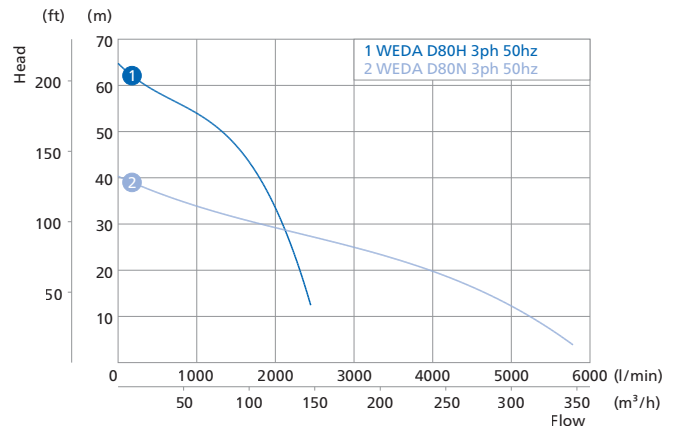

WEDA D90L, D90H

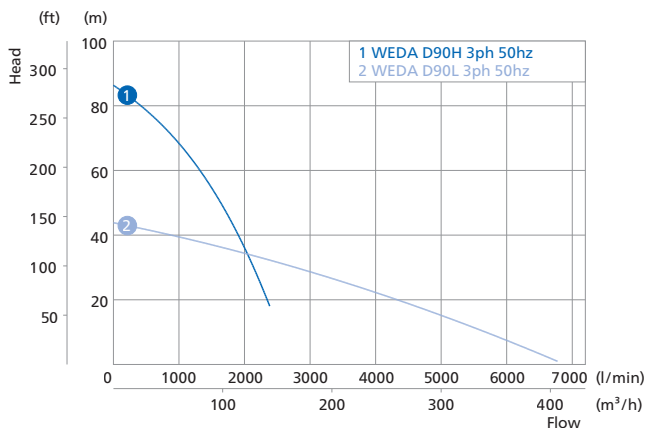

WEDA D100N

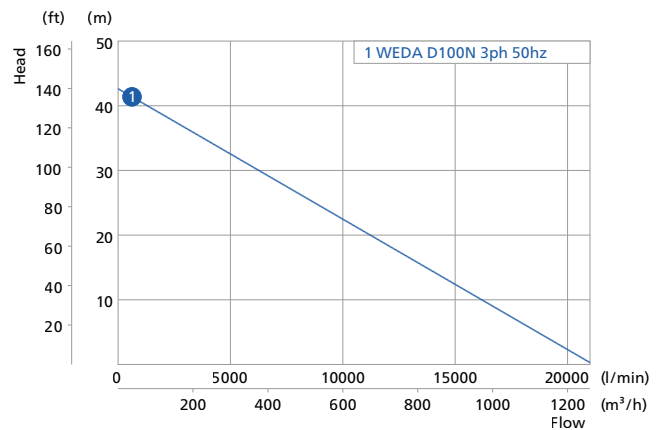


WEDA S range

Technical data



		WEDA S04N	WEDA S08N	WEDA S30N		WEDA S50N	WEDA S60N
Specifications		1ph	1ph	1ph	3ph	3ph	3ph
Max. head	m	10.5	13.0	13	15	23	25
Max. flow	l/min	270	317	800	950	1450	1750
	m ³ /h	16	19	48	57	87	105
Shaft speed	r.p.m.	2900	2900	2900	2900	2900	2900
Rated output	kW	0.4	0.75	1.8	2.5	4.8	6.9
Max. power input	kW	0.65	1.2	2.1	3.1	5.4	8.1
Discharge connection	inch	2"	2"	3"	3"	4"	4"
Max. solids handling size	mm	25	25	50	50	50	50
Weight and dimensions							
Weight	kg	11	13	25	25	59	65
Height	mm	375	416	620	620	810	870
Width	mm	277	277	326	326	450	450
Diameter	mm	241	241	250	250	350	350

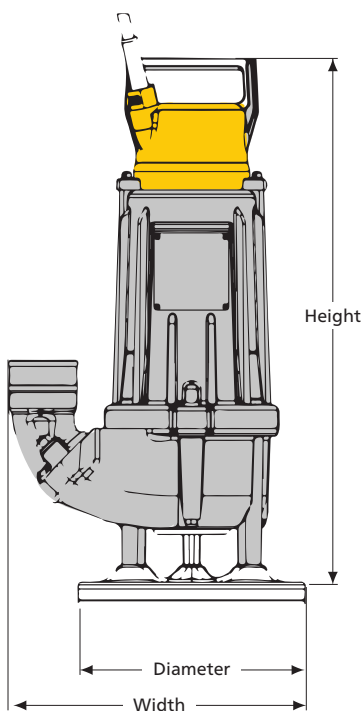


Typical applications

- Water containing mud
- Sludge or light slurry
- Tank clean-out
- Trench and pond cleaning
- Mining




Performance curves


WEDA S04N

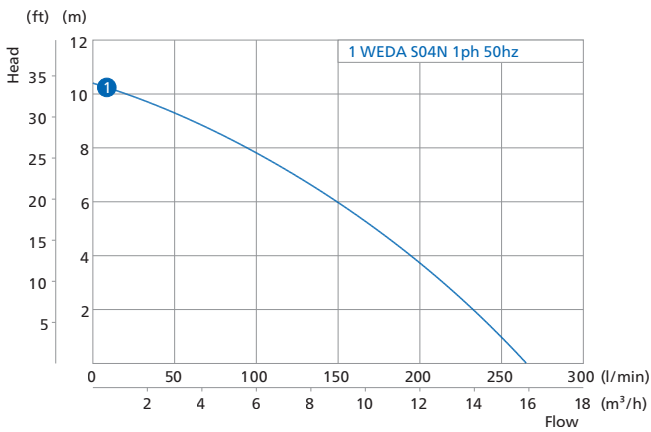


WEDA S08N

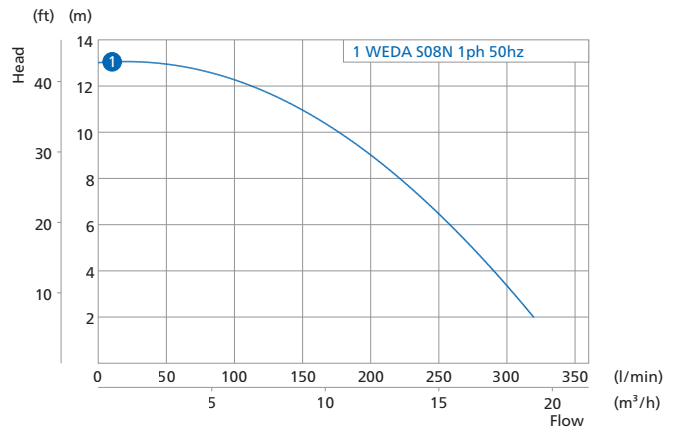


WEDA S30N

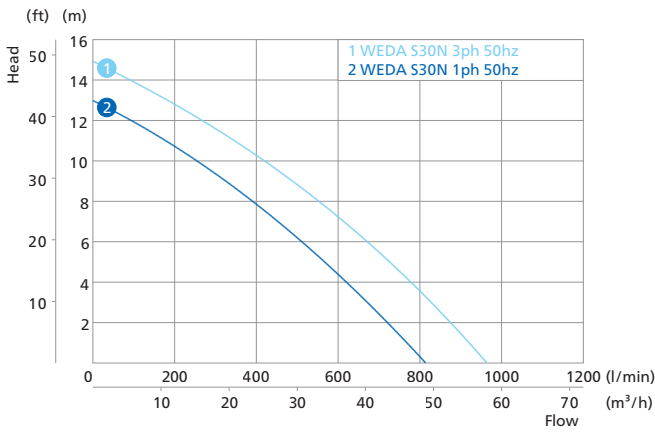

WEDA S50N

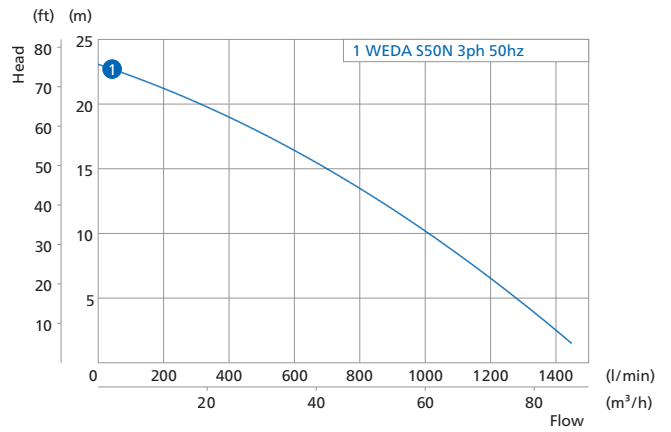

WEDA S60N

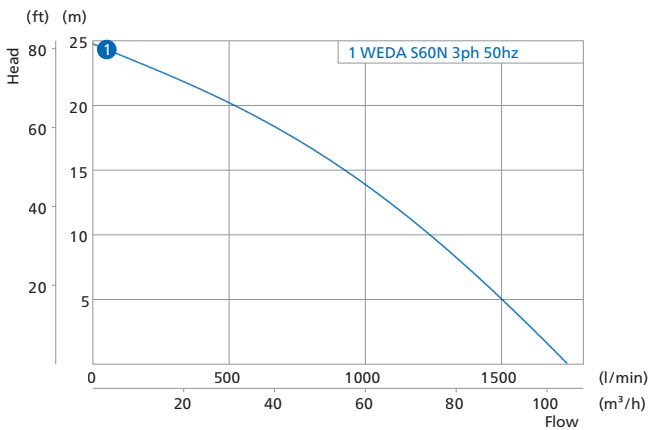

WEDA L range


Technical data



		WEDA L40N	WEDA L50N	WEDA L60N	WEDA L70N	WEDA L80N	WEDA L95N	WEDA L100N	WEDA L110N
Specifications		3ph	3ph	3ph	3ph	3ph	3ph	3ph	3ph
Max. head	m	13.5	17	23	24	26	47	30	43
Max. flow	l/min	1150	1700	1200	1500	3300	4800	11000	12500
	m ³ /h	69	102	72	90	198	288	660	750
Shaft speed	r.p.m.	1450	1450	1450	1450	1450	1450	980	1450
Rated output	kW	3.7	5.5	9.0	11.0	15.0	37	45	75
Max. power input	kW	4.5	6.8	10.4	12.8	16.1	40	49	80
Discharge connection	inch	3"	4"	4"	4"	4"	4"	6"	6"
Max. solids handling size	mm	20	25	25	25	25	35	60	60
Weight and dimensions									
Weight	kg	185	260	260	270	310	750	1005	1070
Height	mm	793	914	914	914	1080	1605	1605	1605
Width	mm	388	435	435	435	580	935	935	935
Diameter	mm	337	413	413	413	495	546	546	546


Typical applications

- Abrasive media with high solids content
- Dredging
- Quarries
- Settling ponds

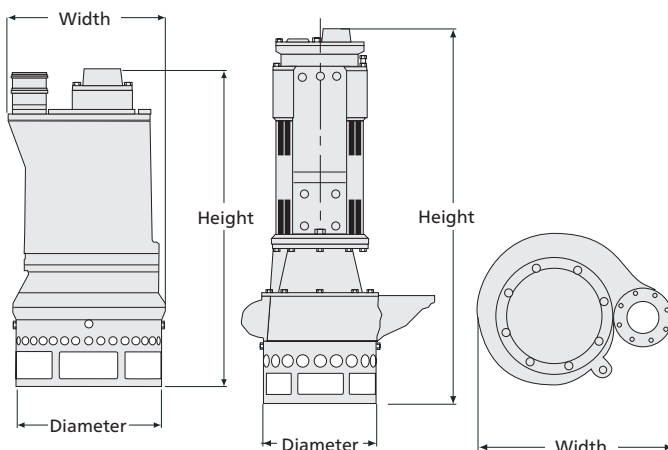


Performance curves


WEDA L40N

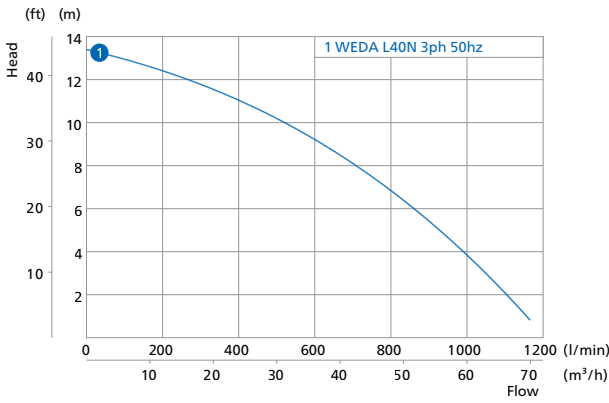


WEDA L50N

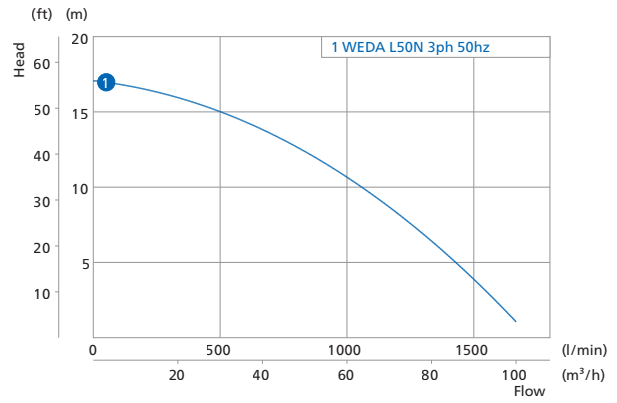


WEDA L60N

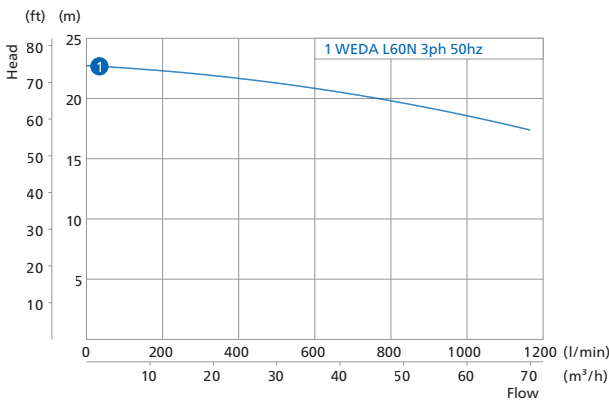


WEDA L70N

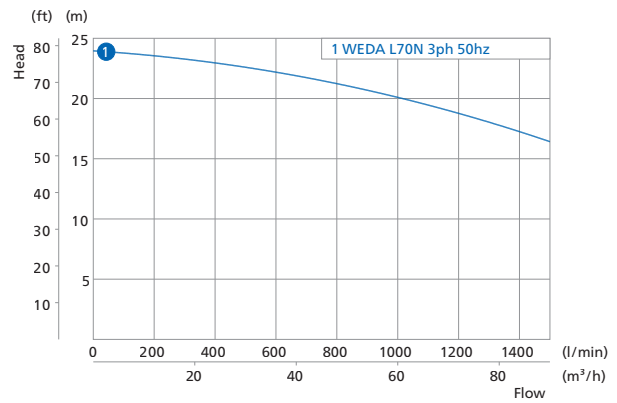


WEDA L80N

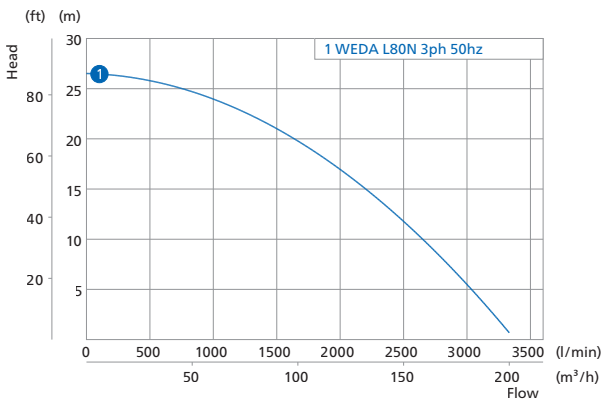


WEDA L95N

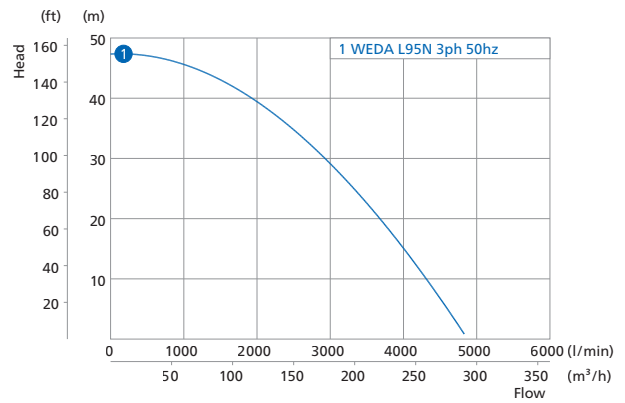

WEDA L100N

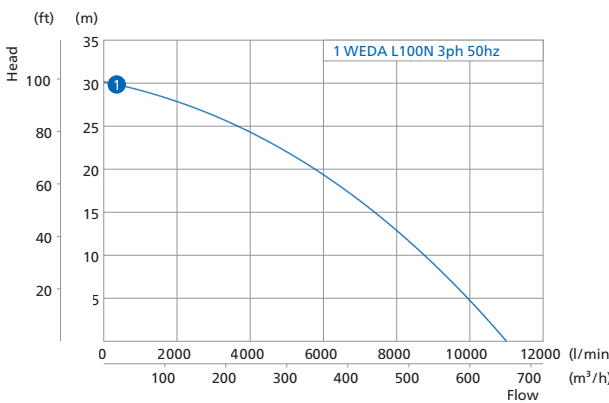

WEDA L110N

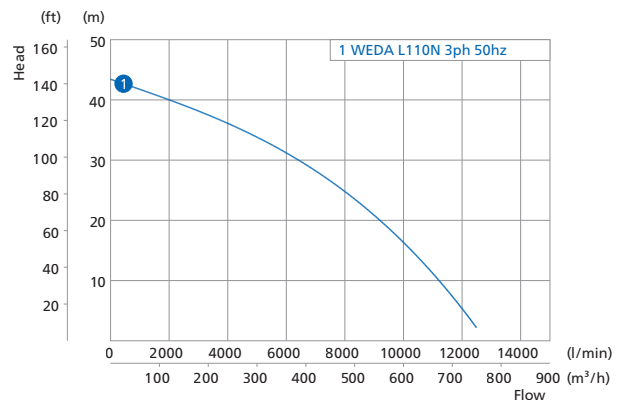

According to ISO 9906 – ANNEX A

Accessories

Discharge connections

We understand that you will have preferred equipment connections, so we offer four types. All can be mounted in either a vertical or horizontal position.

- Hose



- Storz



- ISO-G



- NPT



Slim adapter

For lowering pumps in narrow pipes and manholes D50H, D60H, D70H, D90H only.



Raft

For easy floatation of pump with fluctuating water levels. Strainer option available.



Level regulators

For easy control of water level by automatic pump switch-on/-off:



- Float switch

Zinc anodes

Specifically required for pumping water with a high concentration of salts such as sea water, brine, etc.



Low suction collar

To easily drain the water level down to the floor.

Service kits

Seal kit

The seal kit is the proper selection of high quality components for a mechanical seal change to ensure trouble-free operation after servicing.

- O-ring kit
- Mechanical shaft seal



Instant service pack

The instant service pack is a preassembled, tested and ready-to-use seal system containing the mechanical shaft seals, bearings, gaskets and oil to ensure trouble-free operation. It offers a quick onsite repair option due to ease of installation and therefore reduces the machine downtime cost.



Wear part kit

The wear part kit is a typical selection of components to bring the pump performance back to factory standard. The ideal solution for a machine overhaul or refurbishment.

- Impeller
- Wear plate
- Diffuser
- Impeller nut



**Built better.
Built to resist and perform**